



DRAWING

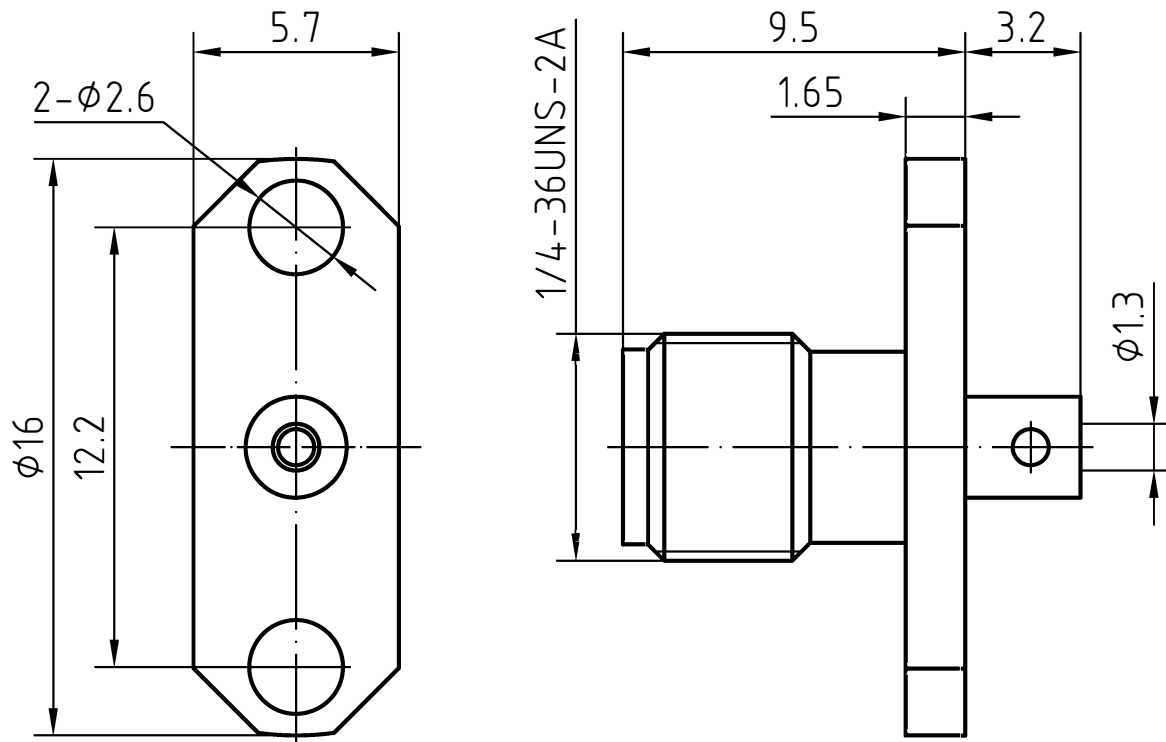

CABLE(UT047)

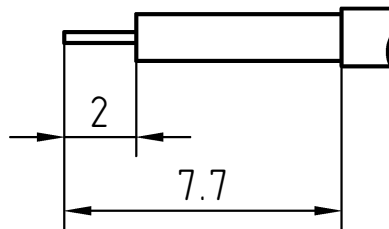

3	1	Body	Brass/Gold plated			
2	1	Insulator	PTFE			
1	1	Center contact	Beryllium copper/Gold plated			
Itemref	Quantity	Title/Name, designation, material, dimension etc			Article No./Reference	
Designed by Xio Xang		Checked by Jing Lo	Approved by Jing Chan	File name SMA-132120J	Date 14.11.28	Scale 5 : 1
RF CONNEC				SMA - 132120J		
				Edition 1.0	Sheet 1/1	

CHARACTERISTICS

DESCRIPTION:

SMA Type female FL connector(2 Holes)

Electrical data:

<i>Impedance:</i>	<i>50 ohm</i>
<i>Frequency range:</i>	<i>DC to 18.0 GHz</i>
<i>VSWR:</i>	<i>$\leq 1.10 + 0.02 \times f \text{ [GHz]}$</i>
<i>Insertion loss:</i>	<i>$\leq 0.15 \times \sqrt{f \text{ [GHz]}} \text{ dB}$</i>
<i>Insulation resistance:</i>	<i>$\geq 5000 \text{ M}\Omega$</i>
<i>Test voltage:</i>	<i>1000 V rms</i>
<i>Working voltage:</i>	<i>480 V rms</i>
<i>Contact resistance:</i>	
1). Centre contact:	<i>3.0 mΩ</i>
2). Outer conductor:	<i>2.0 mΩ</i>
<i>Power handling</i>	<i>$\leq 200 \text{ W @ 2 GHz}$;</i>
<i>RF-leakage(at 20 ° C, sea level, VSWR 1.0):</i>	<i>$\geq 100 \text{ dB up to 1 GHz}$</i>
<i>- Limitations are possible due to the used cable type -</i>	

Environmental data:

<i>Temperature rating:</i>	<i>-65 ° C to +165 ° C</i>
<i>2002/95/EC (RoHS):</i>	<i>Compliant</i>

Mechanical data:

<i>Mating cycles:</i>	<i>≥ 500</i>
<i>Coupling nut retention</i>	<i>$\geq 270 \text{ N}$</i>
<i>Coupling test torque:</i>	<i>$\leq 1.1 \text{ Nm}$</i>
<i>Recommended torque:</i>	<i>0.46 Nm to 0.69 Nm</i>

Suitable cables:

UT047